

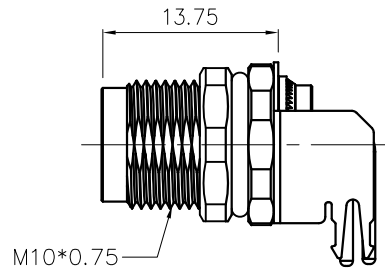


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



SRSR-M8A-XXP-FF-SF7001-00A(H)


Pin number:03,04

NOTES:

- 1.Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
- 2.Withstanding voltage : 3,4pin:AC850V/1Min
- 3.Levels of protection:IP67
- 4.Wire connection mode:soldering(PCB)
- 5.Operating temperature:-40°C~+105°C
- 6.For Panel Thickness Range: 2.0~3.0mm
- 7.For PCB Thickness Max: 1.6mm
- 8.RoHS Compliance
- 9.Tolerance :


.X	±0.25mm
.XX	±0.1mm
∠	±1°

3pin A Coding




Pin Assignment Front View


4pin A Coding




Pin Assignment Front View



Panel cut



PCB layout



PCB layout

DETACHED LISTS	PART NO.: SRSR-M8A-XXP-FF-SF7001-00A(H)		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: SRSR-M8A-XXP-FF-SF7001-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	SHEET 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX	SCALE	1:1
		MM (INCH)	DO NOT SCALE DRAWING	