


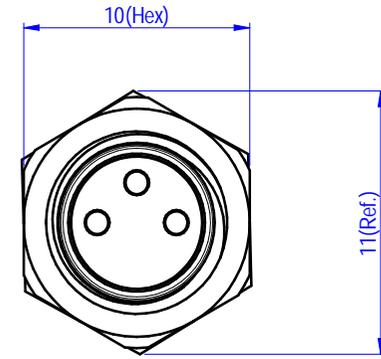
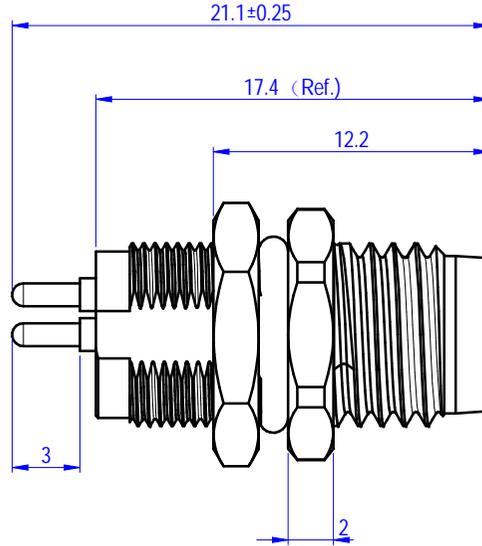


Transfer or duplication of this document as well as the utilization or communication of its contents without the written consent of DEGSON will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经书面明确授权，否则禁止转让、复制、利用、交流本文件的内容，否则将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

Dimensional tolerance(mm)				
0	>30	>60	>100	>150
~	~	~	~	~
±0.25	±0.35	±0.55	±0.80	±1.10

额定电压/电流/Rated Voltage/Current	60V/3A
耐电压/Withstanding voltage	850V AC
使用温度范围/Operating temperature(°C)	-40~+105
防水等级/Levels of protection	IP67
绝缘电阻/Insulation resistance	≥100MΩ
符合RoHS环保要求/Conform to RoHS	Yes



Pin Assignments  
Front View

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE



MATERIAL: 材质	SURFACE: 表面处理
MAT. NO./REV: 物料编码 / 版本	MAT STATUS: 物料状态

APPD: 核准人	核准日期
CHKD: 审核人	审核日期

NAME	物料名称			
------	------	--	--	--

DRFT: 设计人	设计日期
-----------	------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
图号	图纸类型	图纸状态	3:1	1/1