

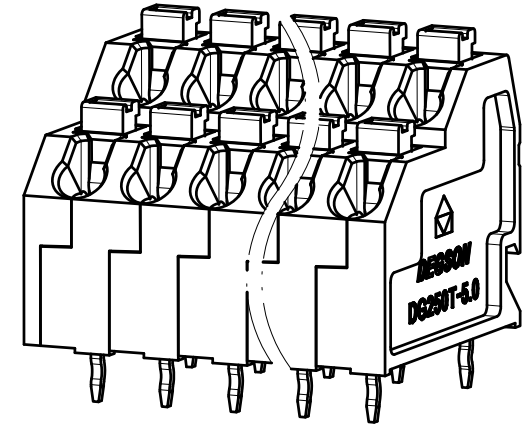
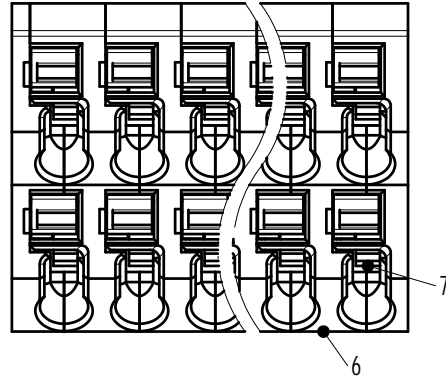
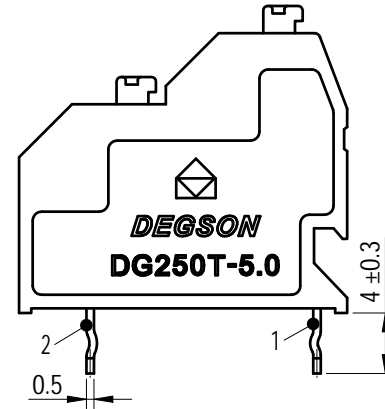


未注公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

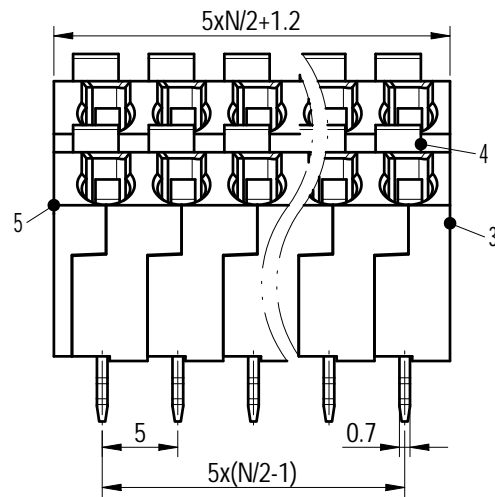

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
7	Spring	Stainless steel	/
6	Housing	PA66	UL94V-0
5	Left cover	PA66	UL94V-0
4	Button	PA66	UL94V-0
3	Right cover	PA66	UL94V-0
2	Short pin	Copper	Sn plated
1	Long pin	Copper	Sn plated

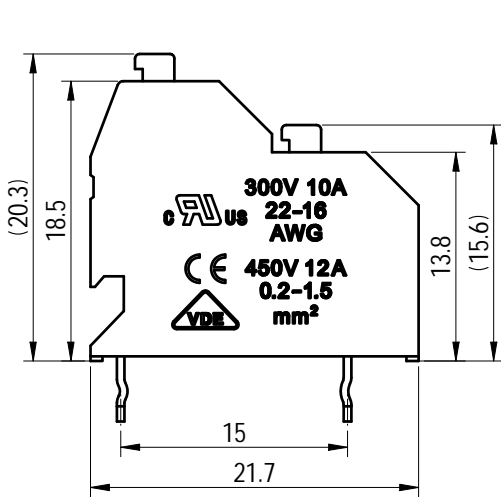

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/12 /
工频耐压/Withstanding Voltage(V/Mn)		AC2500	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		22~16 / 0.2~1.5	
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~48P	
剥线长度/Stripping length(mm)		9~10	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

DEGSON		MATERIAL: -	SURFACE/COLOR:	
APPD: 兰春华 2023.03.02		MAT NO./REV: - / 00	MAT STATUS: 批量	
CHKD: 陈招 2023.03.01		NAME		
DRFT: 袁路易 2023.03.01		DG250T-5.0-XXP-1Y-00A&Z(H)		
DRAWING NO. 200022094		TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			袁路易	2023.03.01

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 未经授权，不得复制或传播本文件内容。保留所有权利。如有侵权，请及时联系本公司。 未经授权，不得复制或传播本文件内容。保留所有权利。如有侵权，请及时联系本公司。