
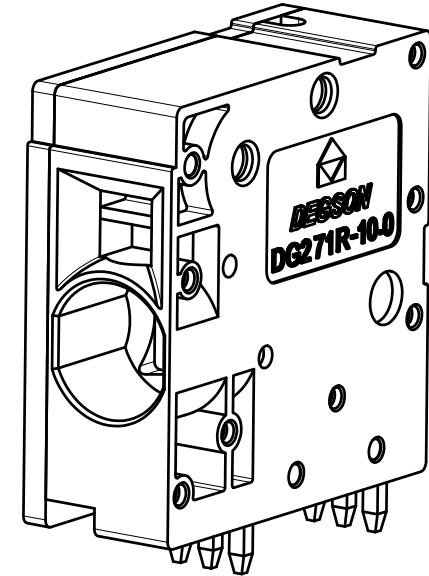
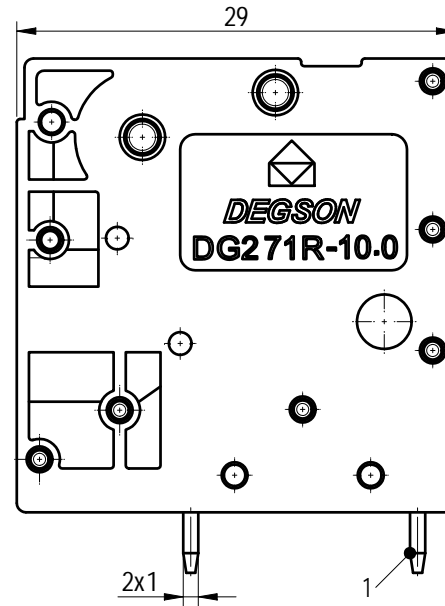
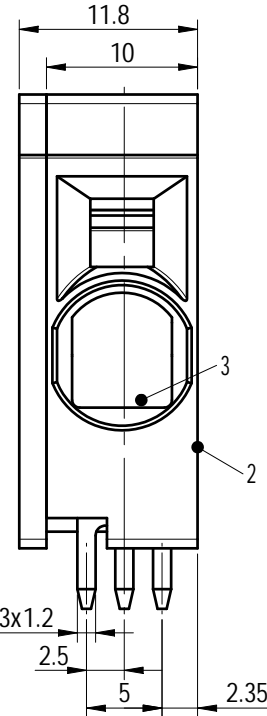
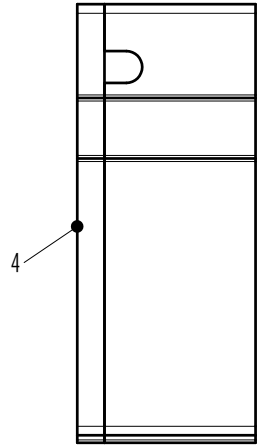


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	

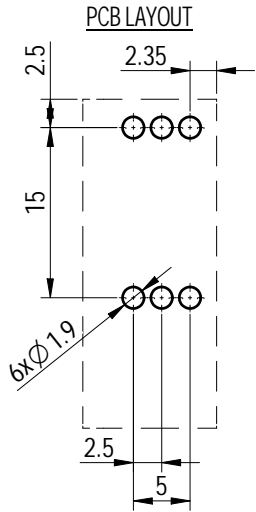

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cover	PA66	UL94V-0
3	Spring	Stainless steel	/
2	Housing	PA66	UL94V-0
1	Pin header	Copper	Sn plated

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/70	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/76	1000/76	1000/76
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	8
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~4 / 0.2~16		
间距/Pitch(mm)	10		
剥线长度/Stripping length(mm)	17~18		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

**DEGSON**

APPD: 兰春华 2023.02.03  
 CHKD: 陈招 2023.02.03  
 DRFT: 袁路易 2023.02.03

MATERIAL: -	SURFACE/COLOR:		
MAT NO./REV: -	MAT STATUS: 批量		
NAME			
DG271R-10.0-01P-1Y-100A&Z(H)			

REV	ECN	DESCRIPTION	DRFT	DATE	比例/Scale	图框/Frame	比例/Scale	图框/Frame	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
01			袁路易	2023.02.03	1:1	A4	1:1	200022312	CUSTOMER DRAWING	已发布	2:1	1/1	

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent. 未经授权复制或传播本文件内容，或在本文件内容基础上进行任何修改、复制或传播，均属于侵权行为。本公司保留对本文件内容的所有权利。